
VITA vPad with 10.1" display + furnace

(from 05/2017)

To operate the

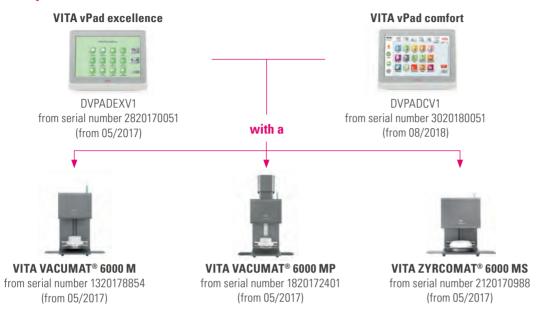

Single operation

In single operation (= **WITHOUT VITA SWITCHBOX**) no power injector cable is required. The vPad is connected directly to the furnace.

To start, proceed as follows:



The vPad is connected directly to the furnace



New vPad/connecting cable (blue point + ring)



Furnace/connecting cable (yellow point + ring)




Use lower port (from 05/2017)

VITA vPad with 10.1" display + furnace

(to 04/2017)

To operate the

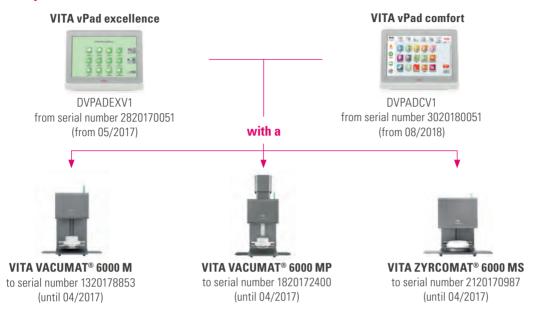

Single Operation

In single operation (= WITHOUT VITA SWITCHBOX) a power injector cable is absolutely required.

To start, proceed as follows:



- 1. Injector
- 2. Connecting cable (vPad excellence Injector)
- 3. Connecting cable (Injector furnace)
- 4.Adapter



Injector/connecting cable (yellow point + ring)



New vPad/connecting cable (blue point + ring)



1/5 = on-switch / off-switch only for the vPad, furnace is switched on/off via the main switch



Use upper port (until 04/2017)

